


STATE OF COLORADO
Examining Board of Plumbers

Modular/Mobile Housing Homeowner Instructions

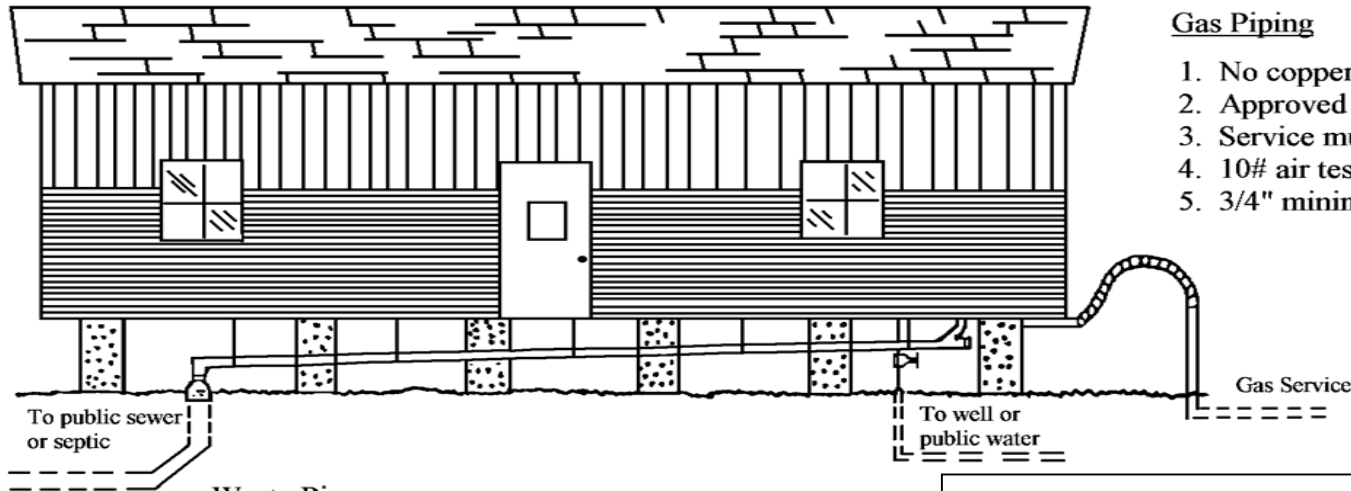

Gas Piping

1. No copper piping in system
2. Approved mobile home flex connector only
3. Service must penetrate outside of mobile
4. 10# air test on gas lines must be witnessed
5. 3/4" minimum size gas service


Waste Pipes

1. Schedule 40 ABS or PVC
2. No mixing of ABS & PVC (black & white)
3. Minimum fall 1/4" per foot
4. Minimum strapping or blocking every 4'
5. Connection to sewer with approved rubber adaptor
6. Clean-out at upper terminal

Water Pipes

1. CPVC*, PEX or Copper under modular/mobile home
2. 3/4" service (may be 5/8" OD in modular/mobile home park)
3. Shut-off under modular/mobile home
4. Any hose bib must have a vacuum breaker

* use either orange glue or Flow Guard 1 Step glue with primer

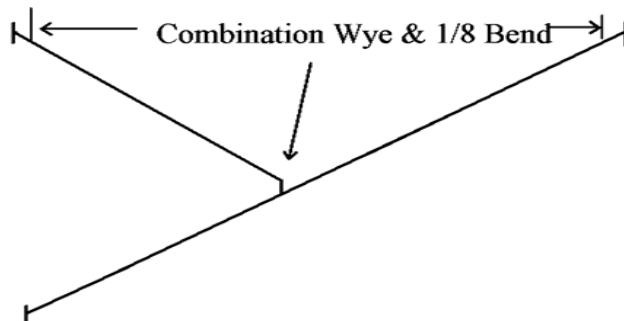

Double Wide Waste Piping

1. Combo only on horizontal to horizontal and vertical to horizontal directional changes
2. Clean-out at each branch over 5' in length in addition to clean-out at upper terminal
3. Strapping or blocking every 4'